



Technical Data SuperFlow™

Laboratory (SuperFlow™ 4)

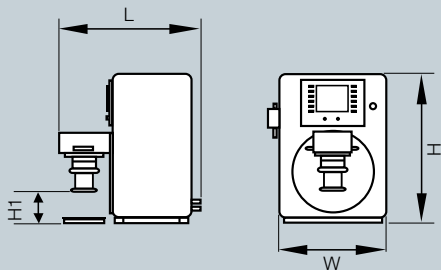

Production

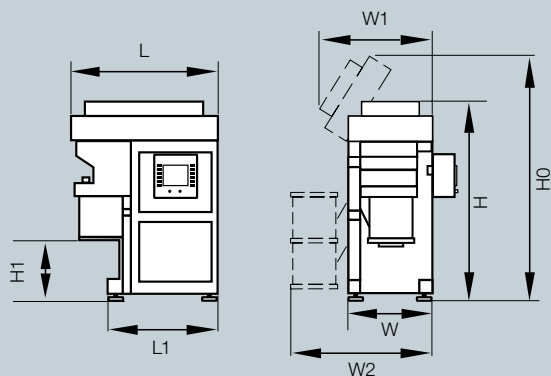

SuperFlow™		4	12	85	VCR200	VCR400
Drive [kW]		2.2	5.5	30	45	90/105
Active mill chamber volume [l]		0.275	1.2	9.5	15	32
Grinding media separation	centrifugally with following protective screen	●	●	●	●	●
Flow rate [l/h]	depending on viscosity, grinding media type and pump, e.g.	60	300	1,200	2,500	5,000
Cooling	Outer stator	●	●	●	●	●
	Stator bottom	-	●	●	●	●
	Inner stator	-	●	●	●	●
	Rotor	-	-	-	●	●
Lifting device for grinding vessel	Hydraulic hand pump	-	●	-	-	-
	Hydraulic foot pump	-	-	●	●	●
	Motored hydraulics	-	-	-	-	-
Dimensions	H	862	920	1,905	2,110	2,860
	H0	-	1,240	2,270	2,560	3,430
	H1	150	270	670	680	870
	L	756	825	1,285	1,550	1,940
	L1	-	620	971	1,200	1,380
	W	617	480	782	857	1,050
	W1	-	650	1,027	1,123	1,460
	W2	-	750	1,200	1,420	1,720
Frame design	closed	●	●	●	●	●
	open	-	-	-	-	-
Approx. weight [kg]		150	270	1,608	2,100	3,420

All data are approximate. Subject to technical alterations.

Bühler AG
 CH-9240 Uzwil, Switzerland
 T +41 71 955 11 11
 F +41 71 955 31 49
 grinding.dispersion@buhlergroup.com
 www.buhlergroup.com

