


Double Slide-Gate Feeder MWSU.

MWSU –
Feeder for
free-flowing
products.



MWSU double slide-gate feeder
Accurate feeding.

Application


This double slide-gate feeder feeds free-flowing products such as grain, semolina, or feed pellets into weighing systems.

Its separate fast and dribble flow feed modes enable accurate product feed even at high throughput capacities.

Advantages, features

- Accurate feeding
- Wide range of applications thanks to fast and dribble flow modes
- High sanitation thanks to streamlined geometry
- High operating reliability thanks to straightforward design

Fast and dribble flow modes.
Accurate feeding.

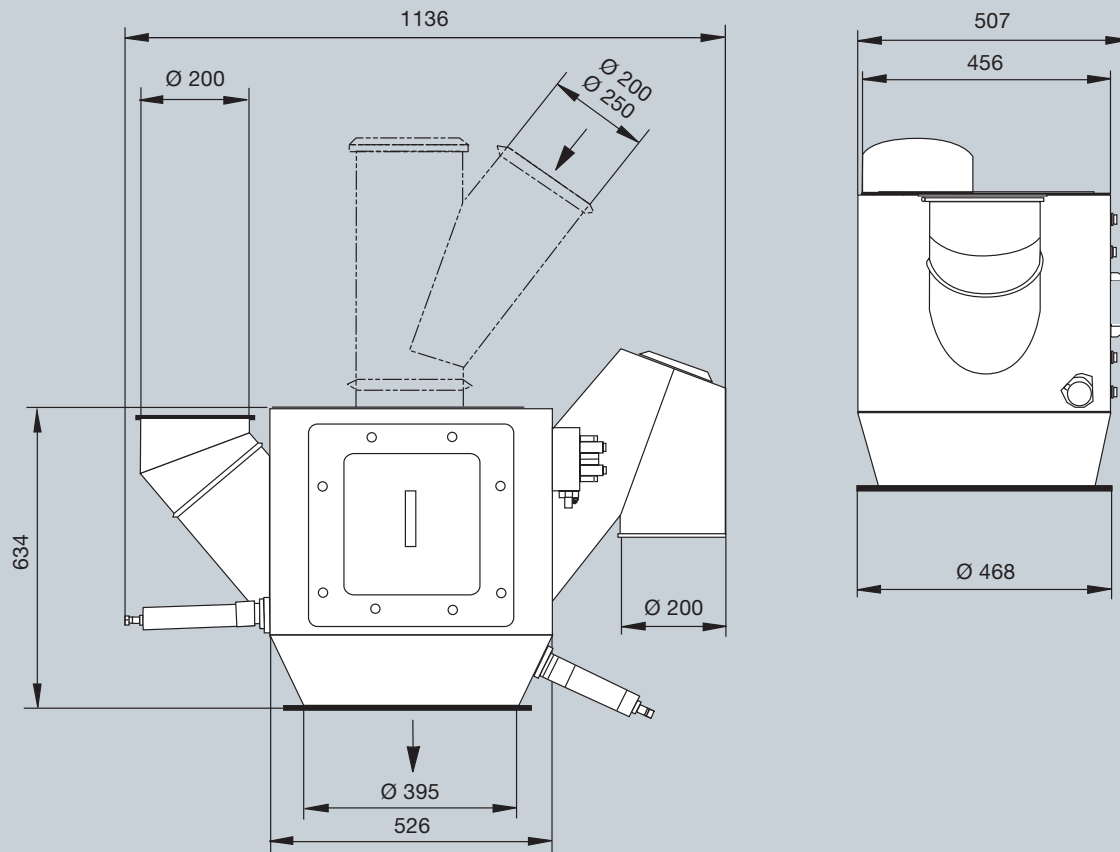

Technical data

Type	Feed range	Electrical connection values 24 VDC	Compressed air consump. per feed cycle [NL]	Approx. weights in kg		
				net	gross	see packing
MWSU to MSDB	from 10 kg	4.2 W 0.18 A	4	70	90	100
MWSU to MWPF-W				80	100	110